



Technology the world trusts

Whether you enjoy the thrill of water sports or just relaxing on your boat, choose the engine that helps you get more out of your time on the water.

Every engine in our range uses Yamaha's latest marine technologies, engine layouts and ingenious intake and exhaust systems - and our 4-stroke development has been so successful because, rather than just adapting ordinary automotive engines for the water, we design and build our marine-specification 4-strokes from scratch.

And, without compromising on power, performance or usability, our marine engines also help preserve the environment through the use of pioneering clean-burn technologies.




- EFI for clean, quiet efficiency and economy
- 16-valve engine layout aids performance
- Compatible with Yamaha Digital Network Gauges
- PrimeStart™ system for easy starting
- Variable trolling RPM
- Wide Range Power Trim & Tilt
- Yamaha Customer Outboard Protection (Y-COP) option
- Optional Tilt Limiter system
- Single-action steering friction (Tiller models)
- High-output 35A alternator
- Shallow Water Drive for cruising close inshore

Now it's lighter, quieter and even more powerful.

The 80hp is now even lighter - so for genuine all-round performance, smooth acceleration and economy, it would be hard to beat. Yamaha's innovative engineering makes it ultra-reliable too.


Our 4-stroke technology offers unmatched performance – thanks to a 16-valve engine with Single Overhead Camshaft (SOHC) for vivid acceleration, advanced intake and exhaust system designs – and Yamaha's unique multi-point EFI (Electronic Fuel Injection)

A range of convenient features – including PrimeStart™, a high-output alternator, Digital Network Gauges and Yamaha's Wide Range Power Trim & Tilt system – gives you the confidence that you're always in full control.

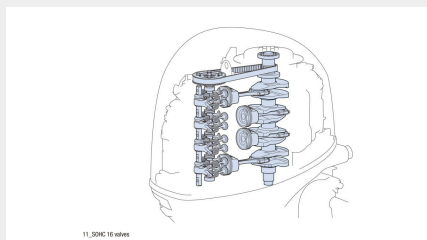

16-valve SOHC engine layout

The SOHC (Single Overhead Camshaft) layout, with its large cylinder capacity and 16-valve format, results in optimum valve actuation, delivering improved acceleration and performance. Yamaha's latest 4-stroke technology combines this with advanced intake and exhaust system designs – and our unique multi-point Electronic Fuel Injection (EFI).

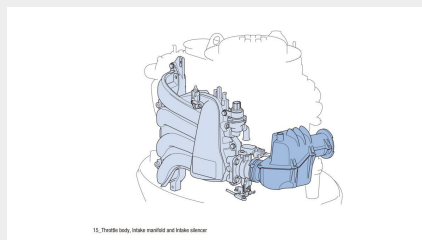


Large single throttle valve

This innovative system controls the flow of air to all four cylinders, pulse-tuning it before it reaches the injectors of the EFI system. The air is therefore delivered with ultimate precision, according to the demands of the driver and the combustion conditions.




Digital Network Gauges

The 80hp is compatible with Yamaha's Digital Network Gauges (6Y8/6YC), giving you the information needed to maximise engine performance and efficiency, including a Multifunction Tachometer with RPM, Hours Run, Trim Angle, Oil Pressure, Warning lamps and Variable RPM control – and a Speed/Fuel Management Gauge with Speed, Tank Capacity and Fuel Economy

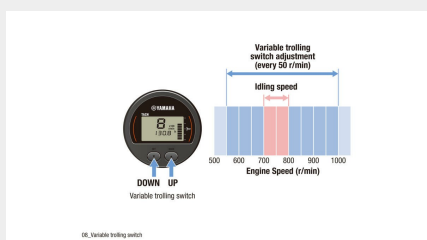

Easy control of engine RPM for trolling (with option)

Another feature of the Digital Network System option is the handy button on the tachometer which gives you instant control of the engine RPM - making it simple to adjust the engine speed in convenient steps of 50 RPM between 550 and 1000 RPM. Smooth, relaxed cruising is the reward.

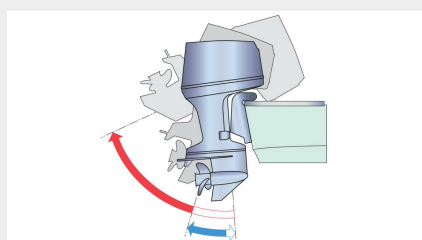

Wide Range Power Trim & Tilt

Discover the versatility and power of a Yamaha engine. Quick response, via push-button control, makes trim and tilt adjustments swift, smooth and easy. The confidence-giving handling control provided by the wide trim range includes negative trim settings to improve acceleration and help bring the boat onto the plane quickly.



Yamaha Customer Outboard Protection (Y-COP) option

The optional Y-COP immobiliser system is simple, easy to use and highly effective – a neat and simple remote control locks and unlocks the engine at the push of a button. This prevents your outboard engine being taken for any unauthorised joyrides, offering you peace of mind when leaving your boat unattended.

Engine		
Engine type		4-stroke
Bore x stroke		81.0 mm x 88.9 mm
Displacement		1,832 cm ³
Prop shaft output at mid range		58.8 kW / 5,500 rpm
Full Throttle Operating Range		5,000 - 6,000 rpm
Lubrication system		Wet sump
Ignition / advance system		TCI
Gear ratio		2.15 (28:13)
Starter system		Electric with Prime Start™
No. of cylinders/Configuration		4/In-line, 16-valve, SOHC
Fuel Induction System		EFI

Dimensions		
Weight with propeller		F80DETL: 162.0kg,F80DETX; 166.0kg
Fuel tank capacity		-
Oil pan capacity		3.2litres
Transom height		L516X:643mm

Additional Features		
Light coil / Alternator Output		12V -35Awith rectifier/regulator
Trim & Tilt method		Power Trim & Tilt
Remark		The kW data in this sheet is based on the ICOMIA 28 standard, measured at the prop shaft
Propeller		Optional
Variable Trolling Speed		With DN Gauges or m-f tiller handle
Shift Dampener System (SDS)		Optional
Control		Remote Control
Engine immobilizer		YCOP optional